


# ANNUNCIATOR MODEL 503A



- FEATURES:**
- Simple, Highly Visual Display
  - One Touch Zone Control
  - Micro-Controller Based
  - Fully Programmable with Free Software
  - Monitor Closed, Open and Multi-State Circuits (High Security)
  - Input to Output Mapping (Multiple Outputs per Zone)
  - Interface with Standard Controls via Communication Bus
  - Up to 64 Zones with more than 30 Options

<b>SPECIFICATIONS</b>	
<b>MOUNTING</b>	Surface
<b>SIZE</b>	14" x 14" x 5"
<b>COLOR</b>	White Powder Coated Steel Box with Stainless Steel Faceplate
<b>POWER</b>	Includes 12 VDC Power Supply Requires 110 VAC Input
<b>INPUTS</b>	Normally Closed, Normally Open or High Security Multi-State End-of-Line Resistor Loop (Color Coded)
<b>OUTPUTS</b>	One Open Collector Output per Zone Rated at 24 VDC, 100 mA (Color Coded)
<b>OTHER</b>	Four Auxiliary Control Inputs and 2 Common Zone Outputs may be programmed for a variety of functions

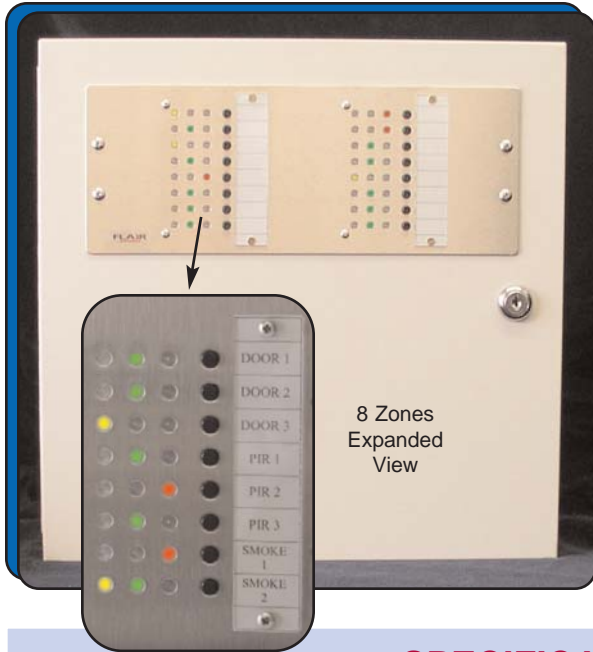

**Intrusion**  
Contacts, Motion Sensors, Panic Buttons, Cameras



**Nurse Call**  
Panic Buttons, Fall Sensors, Cameras



**Perimeter**  
Fence Vibration Sensors, Motion Sensors, Cameras



**Flood**  
Water Sensors

- Accessories from Flair:**
- Magnetic Contacts
  - Fence Vibration Sensors
  - Water Sensors
  - Dialers
  - Remote Graphic Displays

**OPERATION:** *Simple yet Sophisticated .....*

Flair Multi-Zone Annunciators can be used as "stand alone" annunciators or interface with any other control panel via communication bus. Slave configurations are also available for all models. Each zone has a green LED for status, a red LED for alarm memory, a yellow LED for shunt and a zone control button for acknowledge, reset and bypass functions. Zone and common input and output type, timers and other features are programmable with easy to use free software.