



**TRI-FLEX OVERHEAD DOOR  
MAGNETIC CONTACT  
1800-98 SERIES**

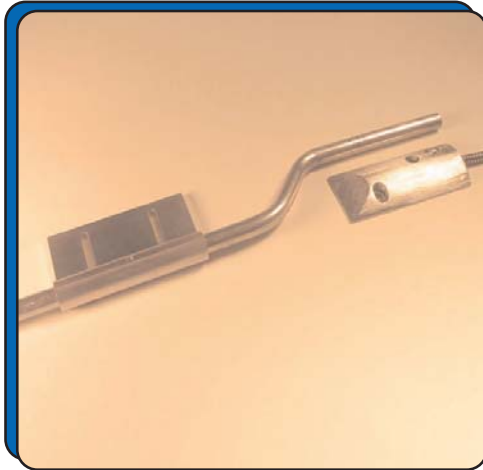

**FEATURES:**

- \* Heavy Duty Aluminum Case
- \* Universal Footprint
- \* 18" Armored Cable with #22 AWG Wire Leads
- \* Tri-Flex Magnet keeps switch out of traffic
- \* Epoxy Sealed for maximum resistance to harsh environments
- \* E.O.L. Resistors, Diodes, Supervisory Loops and Private Labeling Available
- \* Lifetime warranty
- \* Safety Approvals

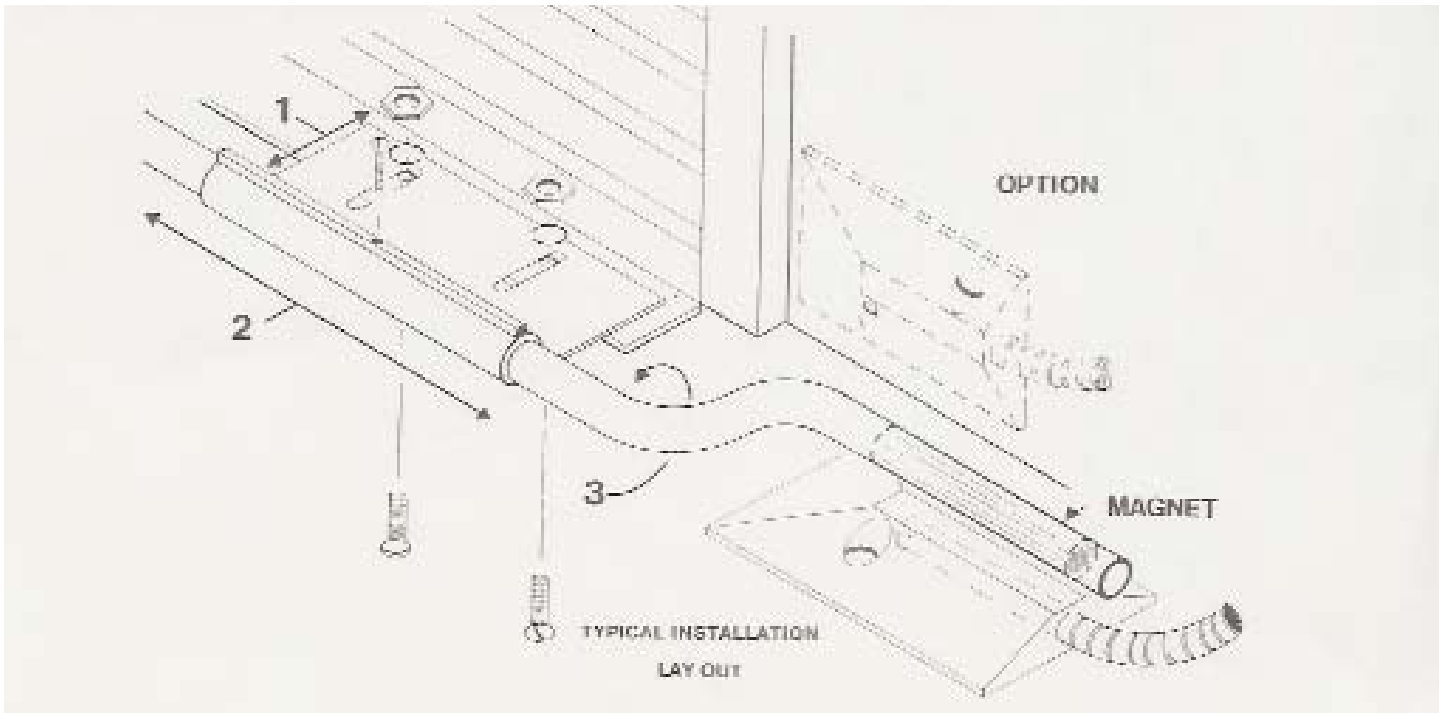

Part Number	Loop Type	Electrical Configuration	Gap	Maximum Initial Contact Resistance (Ohm)	Maximum Contact Rating (W)	Maximum Switching Voltage (VDC/VAC)	Maximum Switching Current (A)
1800-98	Closed	N/O	3"	.100	10	100	.500
1800-96	Open/Closed	SPDT	3"	.100	3	30	.200