


4 7/8" RECESSED ANSI MAGNETIC CONTACT 1000-24SW RAC SERIES




FEATURES:

- * Attractive Grained Corrosion Resistant Stainless Steel ANSI Plate
- * Terminals or Jacketed Leads
- * Epoxy Sealed for maximum resistance to harsh environment
- * Contacts and Magnets available separately
- * E.O.L. Resistors, Diodes and Supervisory Loops Available
- * Lifetime Warranty
- * Safety Approvals

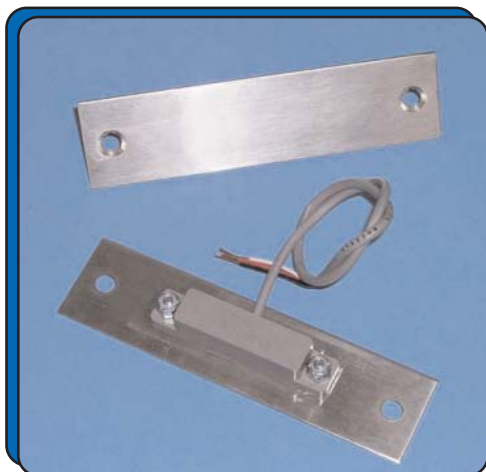

SWITCH AND ANSI
PLATE
(MAGNET SAME)

W = Wide Gap
S = Jacketed Cable

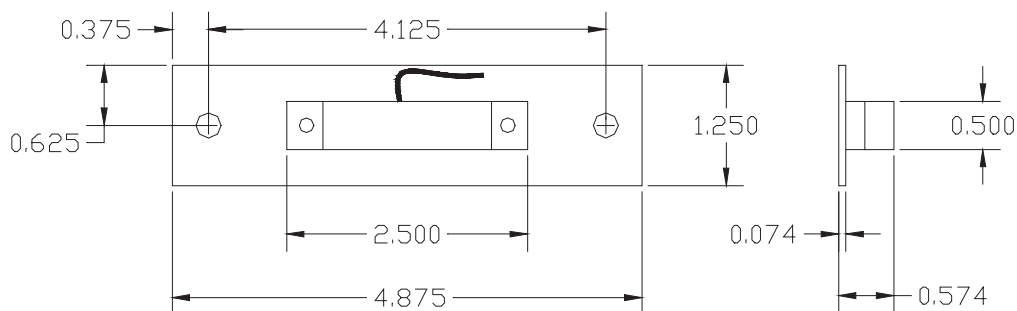

Part Number	Loop Type	Electrical Configuration	Gap (Inch / mm)	Maximum Initial Contact Resistance (Ohm)	Maximum Contact Rating (W)	Maximum Switching Voltage (VDC/VAC)	Maximum Switching Current (A)
1000-24W RAC	Closed	N/O	1 (25.4)	.100	10	100	.500
1000-34W RAC	Open/Closed	SPDT	1 (25.4)	.100	3	30	.100
1000-24SW RAC	Closed	N/O	1 (25.4)	.100	10	100	.500
1000-34SW RAC	Open/Closed	SPDT	1 (25.4)	.100	3	30	.100