

**PULL-APART
MAGNETIC CONTACT
PA1000-80 SERIES**




FEATURES:


- * Secure Any Loose Item
- * Heavy Duty Solid Aluminum Case
- * 36" Stainless Steel Armored Cable Standard, Longer Lengths Available
- * Epoxy Sealed for Maximum Resistance to Harsh Environment
- * Switch Magnetically Locks into Case, Reduces False Alarms
- * Tamper Resistant Screws Included
- * Lifetime Warranty

INSTRUCTIONS: (1) Mount the heavy duty Magnet Case to the object to be protected. (2) Secure the Switch armored cable to a pole or wall or other fixed object using clamps, zip ties or other means available. Make sure there is enough slack in the cable for the Switch to reach the Magnet Case and that there are no other objects that can interfere with the operation of the Pull-Apart Magnetic Contact. Make sure that the armored cable is secure and that there is no strain on the electrical connection during use. (3) Connect cable to alarm control. Alarm will occur once object is removed and Switch is pulled out of Magnet Case.

Option 1: Post Mount

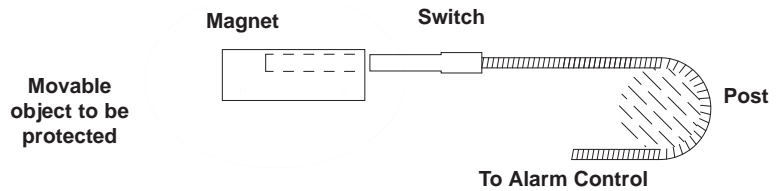

Option 2: Wall Mount

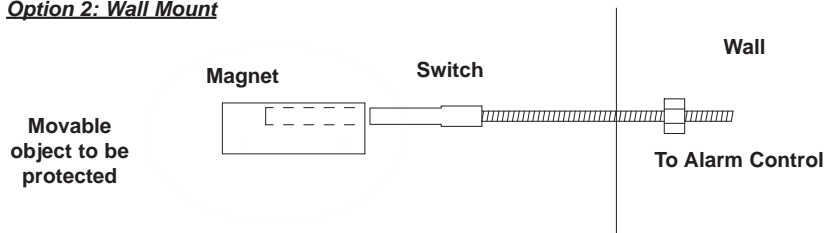

**PROTECT MOTOR CYCLES, GOLF CARTS,
BOATS, TRAILERS, OUTDOOR FURNITURE,
HEAVY EQUIPMENT AND MORE**

Part Number	Loop Type	Electrical Configuration	Maximum Initial Contact Resistance (Ohm)	Maximum Contact Rating (W)	Maximum Switching Voltage (VDC/VAC)	Maximum Switching Current (A)
PA1000-80	Closed	N/O	.100	10	100	.500
PA1000-81	Open/Closed	SPDT	.100	3	30	.200