



**RECESSED 1/4" DIA.
MAGNETIC CONTACT
RMS68-2 and RMS68-1 SERIES**

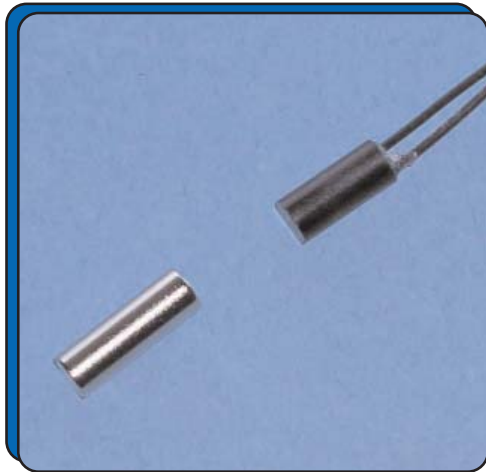

FEATURES:

- * 1/4" Dia. Recessed Magnetic Contact
- * RMS68-1 12" #26 AWG Leads
- * RMS68-2 12" #22 AWG Leads
- * Contacts and Magnets available separately
- * E.O.L. Resistors, Diodes and Supervisory Loops Available
- * Colors: White and Black
- * Lifetime warranty
- * Safety Approvals

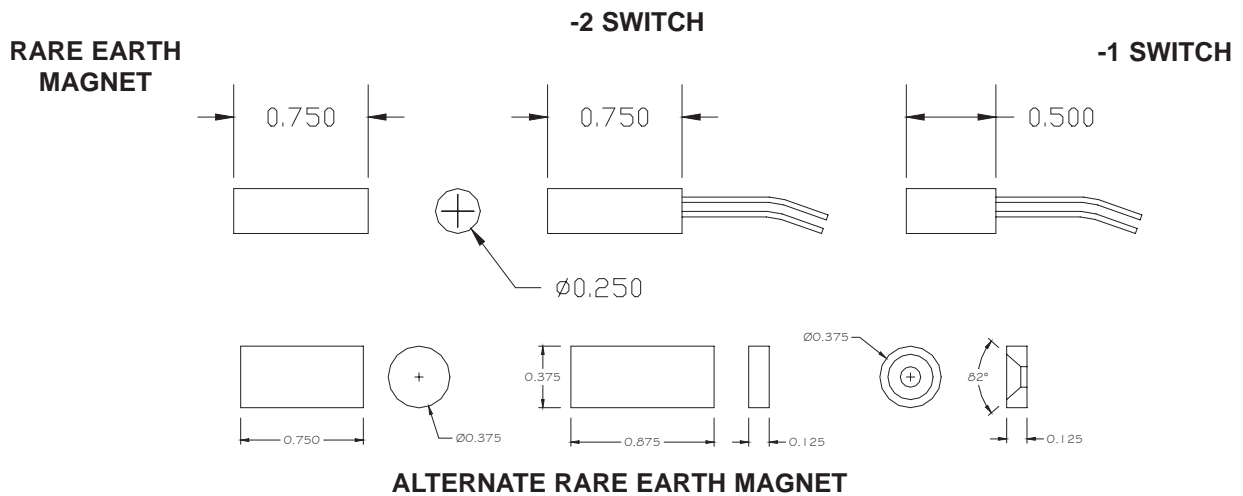

Part Number	Loop Type	Electrical Configuration	Gap (Inch / mm)	Maximum Initial Contact Resistance (Ohm)	Maximum Contact Rating (W)	Maximum Switching Voltage (VDC/VAC)	Maximum Switching Current (A)
RMS68-1	Closed	N/O	1/2 (12.7)	.100	10	100	.500
RMS68-1W	Closed	N/O	1 (25.4)	.100	10	100	.500
RMS68-2	Open	N/O	3/4 (19.1)	.100	10	100	.500
RMS68-2W	Open	N/O	1 1/4 (31.8)	.100	10	100	.500
RMS71-2	Open/Closed	SPDT	3/4 (19.1)	.100	3	30	.200
RMS69-2	Open/Closed	SPDT	3/4 (19.1)	.100	3	30	.200